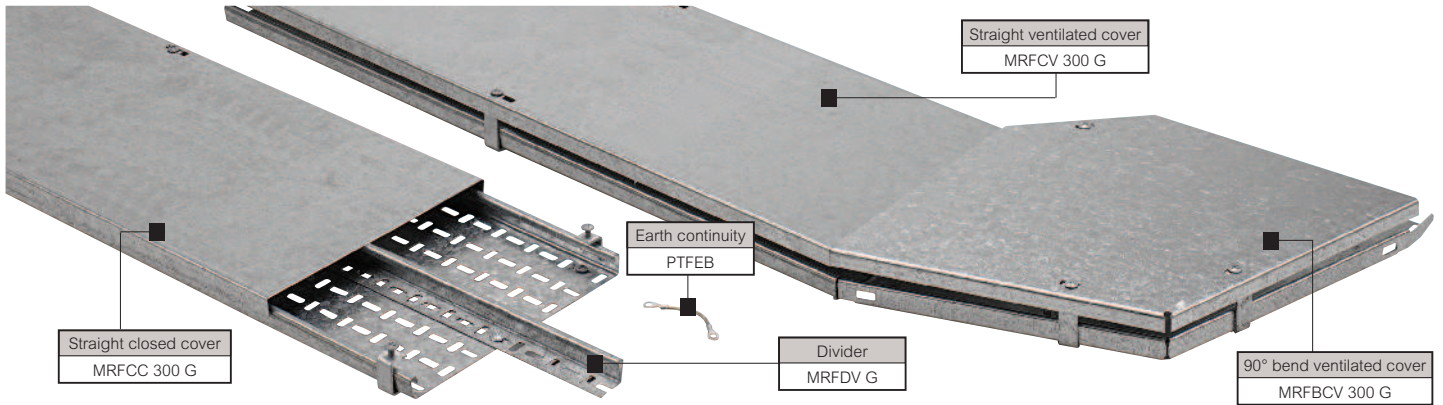








Swifts® cable tray ancillary items / covers

SS light duty, MRF medium duty, SRF heavy duty, XRF extra heavy duty



Dimensions and technical information p. 99-104

| Pack | Cat. Nos. | Ancillary items |
|------|------------------|--|
| 1 | SSDV F | Dividers – 3 m Supplied singly without fasteners Used to separate different types or groups of cable within one cable tray run  |
| 1 | MRFDV F | |
| 1 | SRFDV F | |
| 1 | XRFDV F | |
| 20 | PTFEB | Earth continuity connectors Fasteners not included Use M6 x 12 mm roofing nuts and bolts Copper braid and copper lugs both in electroplated finish Length between centres : 93 mm Conductor area : 4 mm ²  For technical information, p. 99 |
| 1 | SSCC W F | Straight closed covers – 3 m Supplied singly with fasteners and brackets  |
| 1 | MRFCV W F | |
| 1 | SRFCV W F | |
| 1 | XRFCV W F | |
| 1 | SSCV W F | Straight ventilated covers – 3 m Supplied singly with fasteners and brackets  |
| 1 | MRFCV W F | |
| 1 | SRFCV W F | |
| 1 | XRFCV W F | |
| 1 | SS - | Closed covers for fittings Supplied singly with fasteners and brackets Add CC before the width of your completed fitting Cat. No. Examples shown are for a 300 mm equal tee, hot dip galvanised  |
| 1 | MRF - | |
| 1 | SRF - | |
| 1 | XRF - | |

| Pack | Cat. Nos. | Ancillary items (continued) |
|------|-----------|---|
| 1 | SS - | Ventilated covers for fittings Supplied singly with fasteners and brackets Add CV before the width of your completed fitting Cat. No. Examples shown are for a 300 mm equal tee, hot dip galvanised  |
| 1 | MRF - | |
| 1 | SRF - | |
| 1 | XRF - | |

Key : selecting ancillary items. Replace the letters shown in red with your choice from the following options :

W = Widths (mm) : 50, 75, 100, 150, 225, 300, 450, 600, 750, 900
F = Finish : **G** (hot dip galvanised after manufacture), **D** (deep galvanised), **PG** (pre-galvanised)
S (stainless steel), **E** (powder coated black RAL 9005)