


HS25G/Y

**Term Tech Heatshrink 2:1 Ratio 25.4mmØ
Expanded, 12.7mmØ Recovered Green/Yellow
(Per Metre)**



The Termination Technology range of thin wall Cross linked Polyolefin Heatshrink is designed for commercial use with common uses including insulation, wire bundling, colour coding and mechanical protection. Available in a range of colours and sizes, all cut to metre as required. Specialist Heatshrink end caps, breakout boots, joints and adhesive lined versions also available from stock.



Technical Data

Colour and Material

Material Crosslinked Polyolefin

Colour Green/Yellow

Dimensions

Led Flat Width (mm) 43

Durability

Chemical Resistance Resistant to common fluids and solvents

Fungus Resistance Tested with no growth occurring

Electrical Ratings

Dielectric Strength (kV/mm) Min 19.7 Tested to ASTM D-2671

Volume Resistivity (Ohm/cm) Min 10^{13} Tested to ASTM D-876

Physical Attributes

Adhesive Lined No

Product Specification

CE Compliant Yes

ROHS Compliant Yes


Temperature and Fire Information

Continuous Operating Temperature (°C) -55 to +135


Shrink Temperature (°C) +90 to Start Shrinking

Fire Rating UL224 VW-1; MIL-I-23053/5 Class 1 & 3





CE

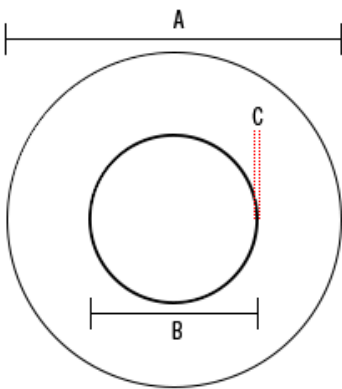

**Termination
Technology Ltd**

Quality and Service

The company with the **RIGHT** connections at the **RIGHT** price.

Company Registration Number: 05062297

W: www.termtech.co.uk

T: 01179 354 900

E: sales@termtech.co.uk

Termination Technology Ltd, Unit 4C Crofts End Ind Estate, Crofts End Road,
Bristol BS5 7UW

