


## HS25RED

### Term Tech Heatshrink 2:1 Ratio 25.4mmØ Expanded, 12.7mmØ Recovered Red (Per Metre)



The Termination Technology range of thin wall Cross linked Polyolefin Heatshrink is designed for commercial use with common uses including insulation, wire bundling, colour coding and mechanical protection. Available in a range of colours and sizes, all cut to metre as required. Specialist Heatshrink end caps, breakout boots, joints and adhesive lined versions also available from stock.



## Technical Data

### Colour and Material

Material Crosslinked Polyolefin

Colour Red

### Dimensions

Led Flat Width (mm) 43

### Durability

Chemical Resistance Resistant to common fluids and solvents

Fungus Resistance Tested with no growth occurring

### Electrical Ratings

Dielectric Strength (kV/mm) Min 19.7 Tested to ASTM D-2671

Volume Resistivity (Ohm/cm) Min  $10^{13}$  Tested to ASTM D-876

### Physical Attributes

Adhesive Lined No

### Product Specification

CE Compliant Yes

ROHS Compliant Yes


### Temperature and Fire Information

Continuous Operating Temperature (°C) -55 to +135


Shrink Temperature (°C) +90 to Start Shrinking

Fire Rating UL224 VW-1; MIL-I-23053/5 Class 1 & 3





# CE

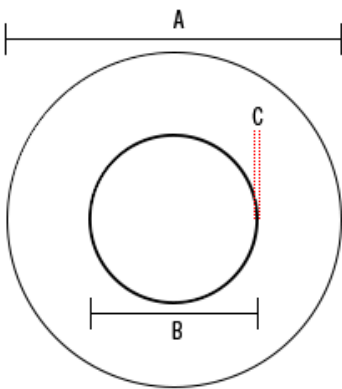

**Termination  
Technology Ltd**

*Quality and Service*

The company with the **RIGHT** connections at the **RIGHT** price.

Company Registration Number: 05062297

**W:** [www.termtech.co.uk](http://www.termtech.co.uk)

**T:** 01179 354 900

**E:** [sales@termtech.co.uk](mailto:sales@termtech.co.uk)

Termination Technology Ltd, Unit 4C Crofts End Ind Estate, Crofts End Road,  
Bristol BS5 7UW

